

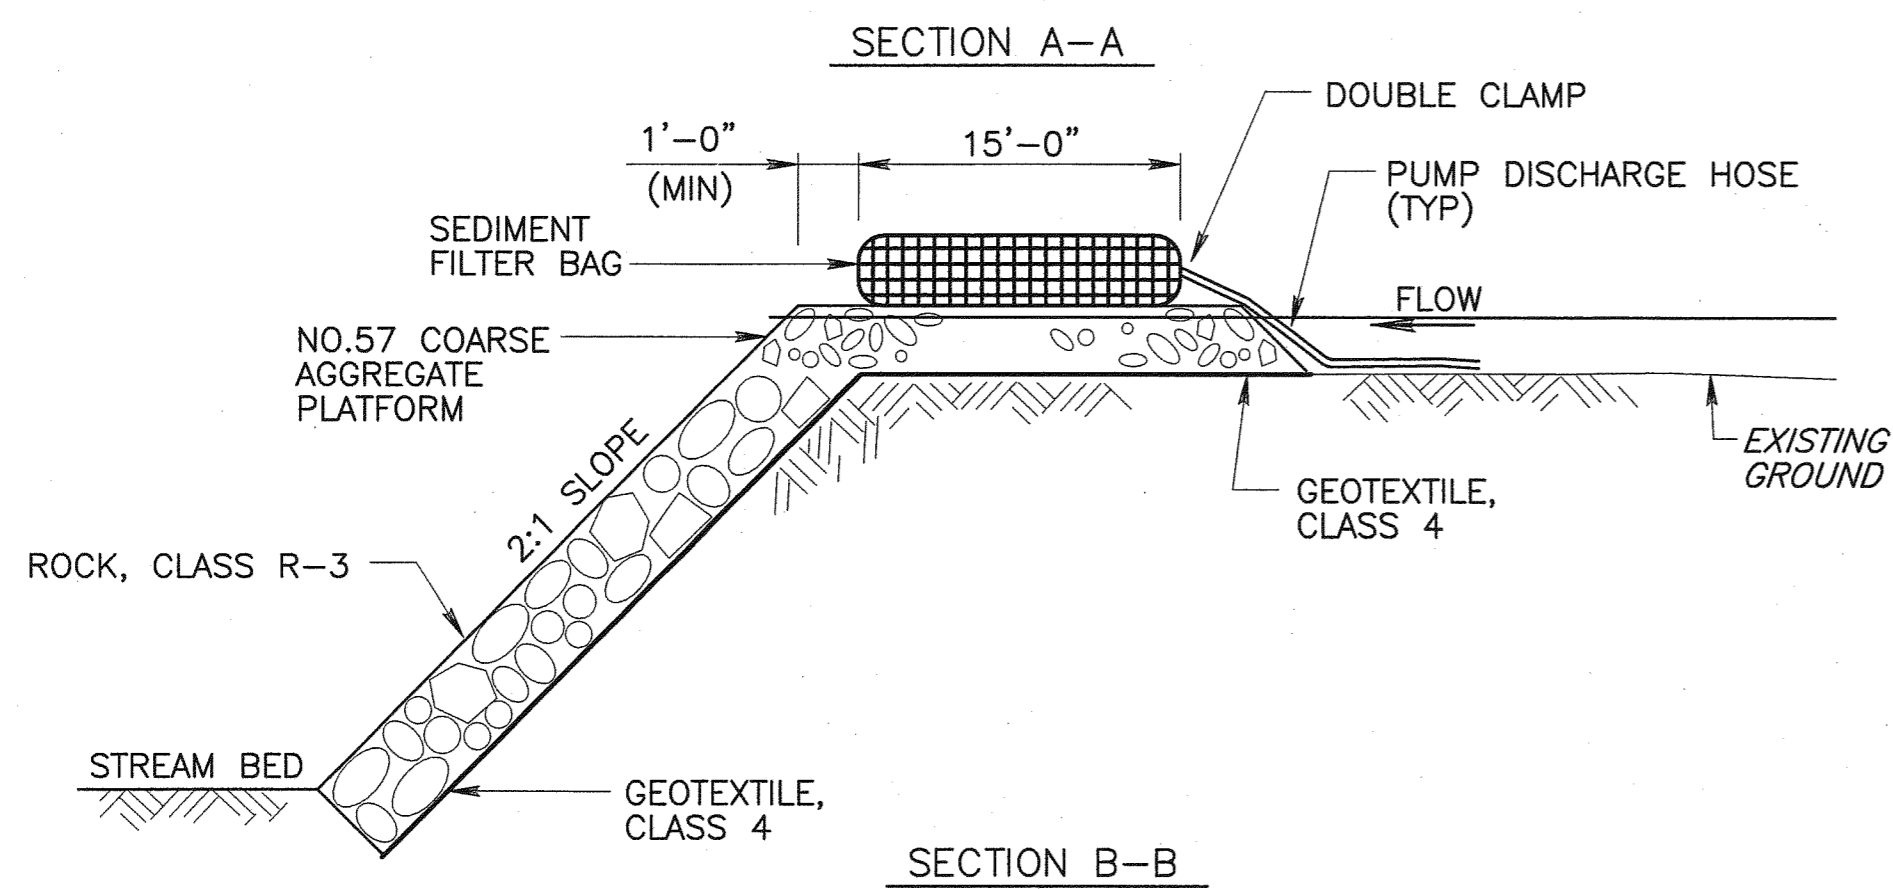
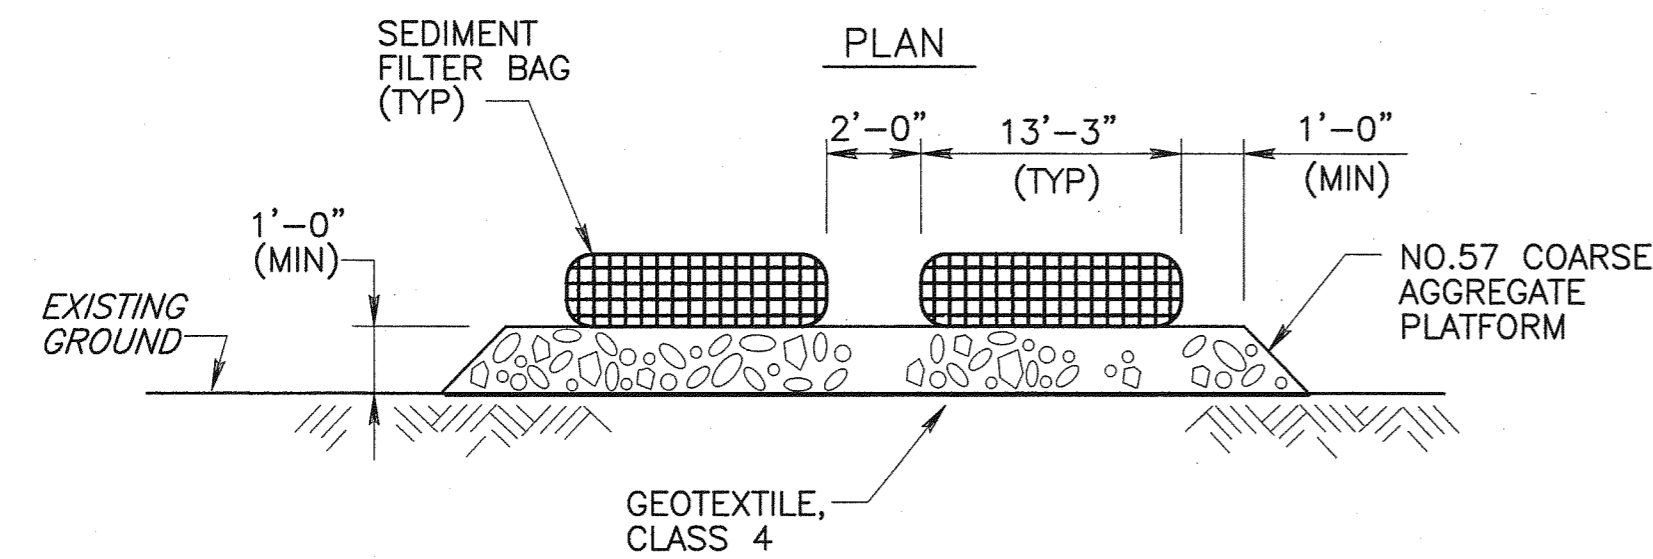
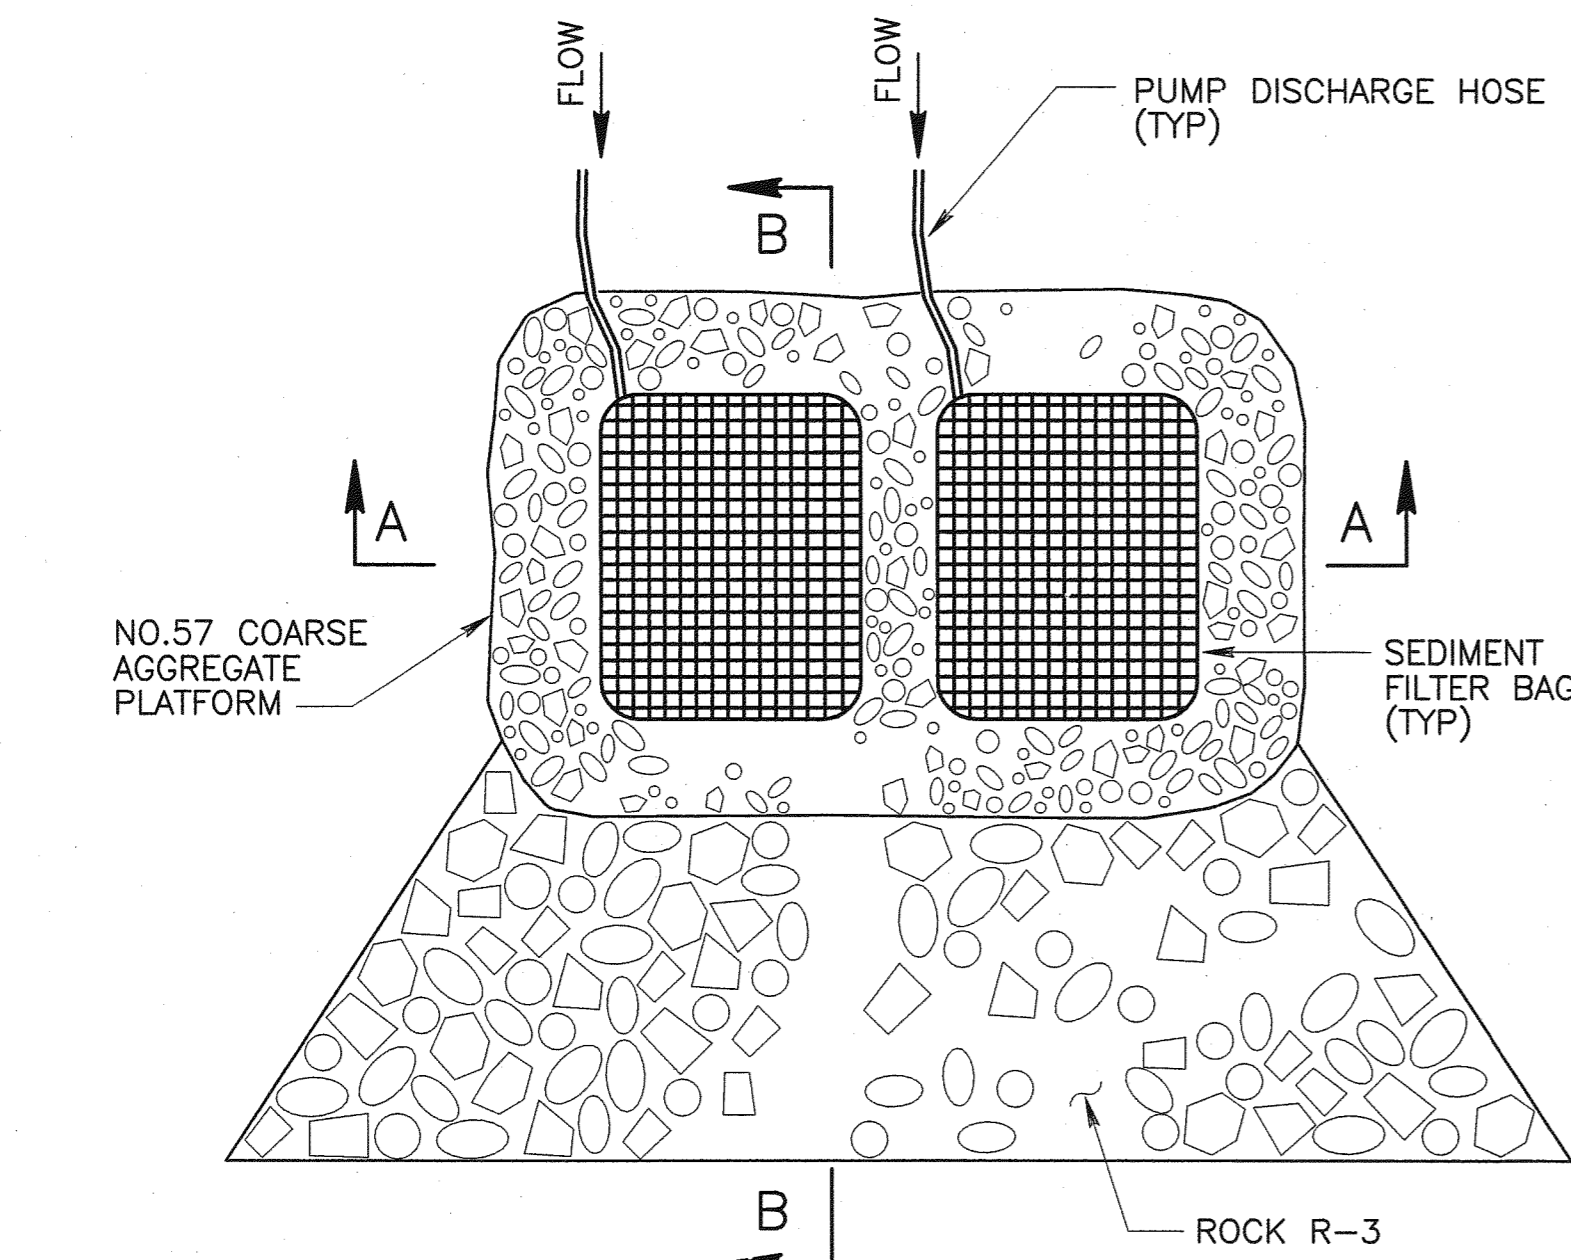
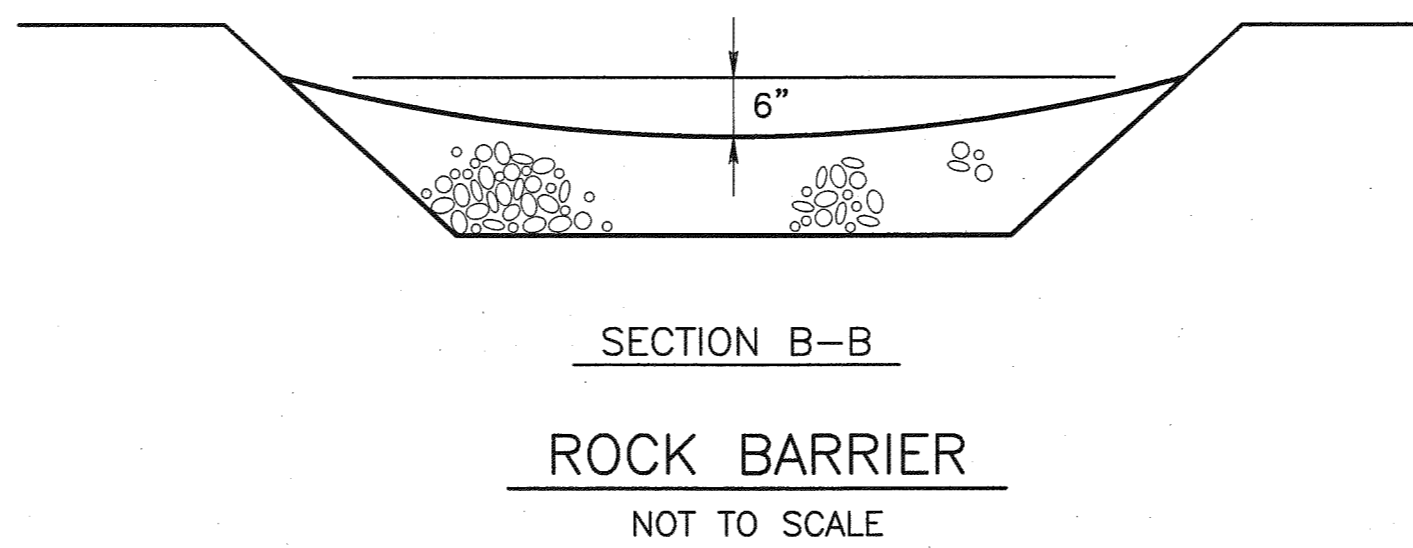



DISTRICT	COUNTY	ROUTE	SECTION	SHEET
8 - 0	CUMBERLAND AND YORK	2011	005	5 OF 15
MONROE TOWNSHIP AND CARROLL TOWNSHIP				
REVISION NUMBER	REVISIONS	DATE	BY	

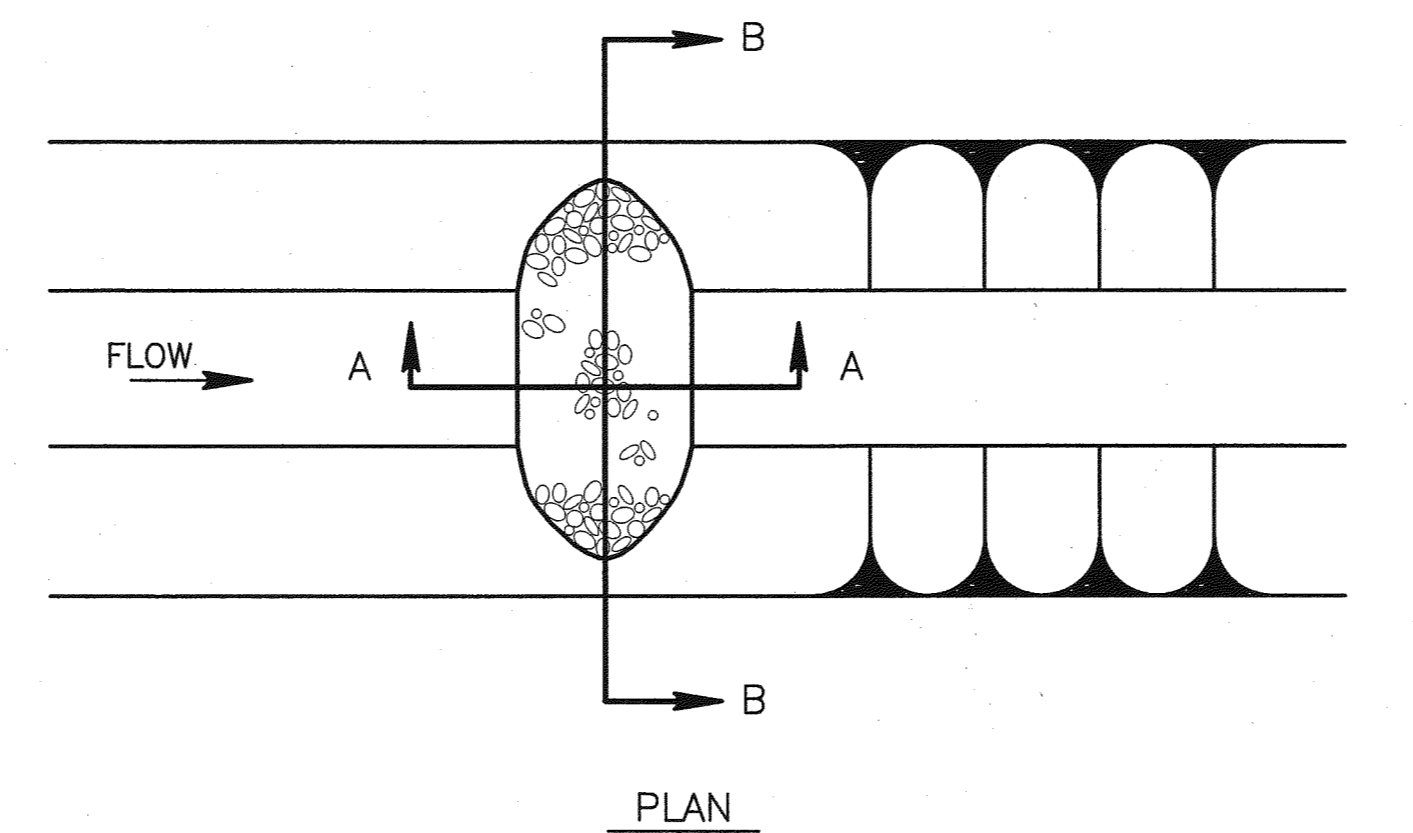

(ITEM 9858-0001)
SEDIMENT FILTER BAG
 NOT TO SCALE

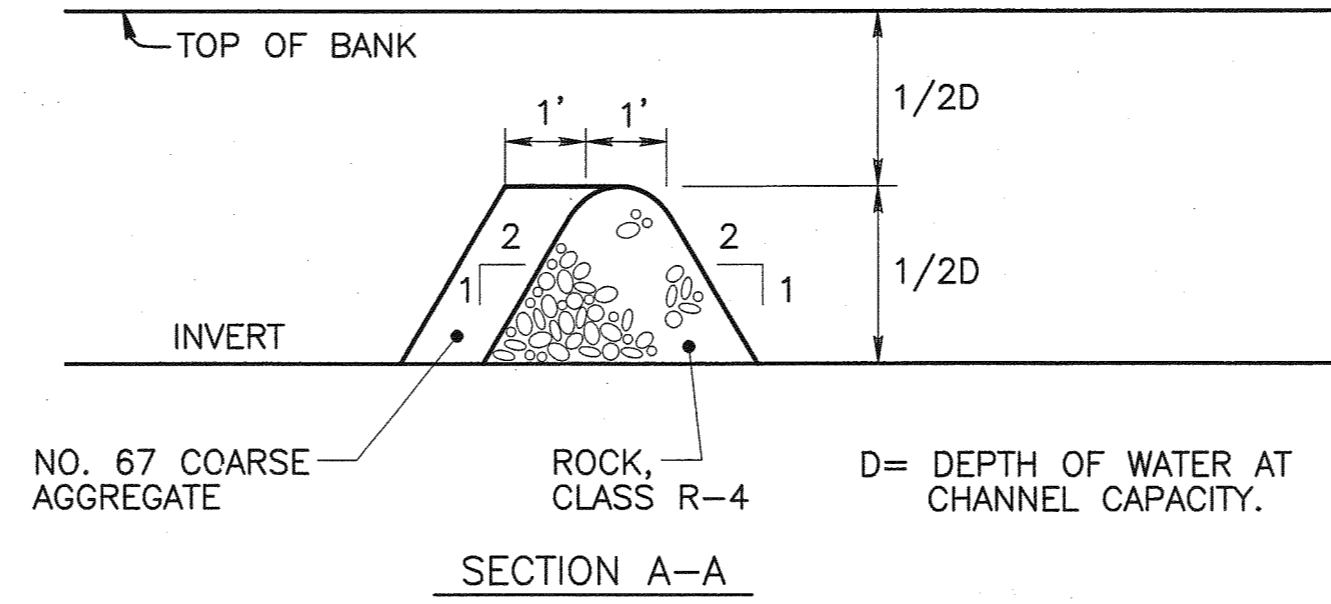

ROCK BARRIER
 NOT TO SCALE

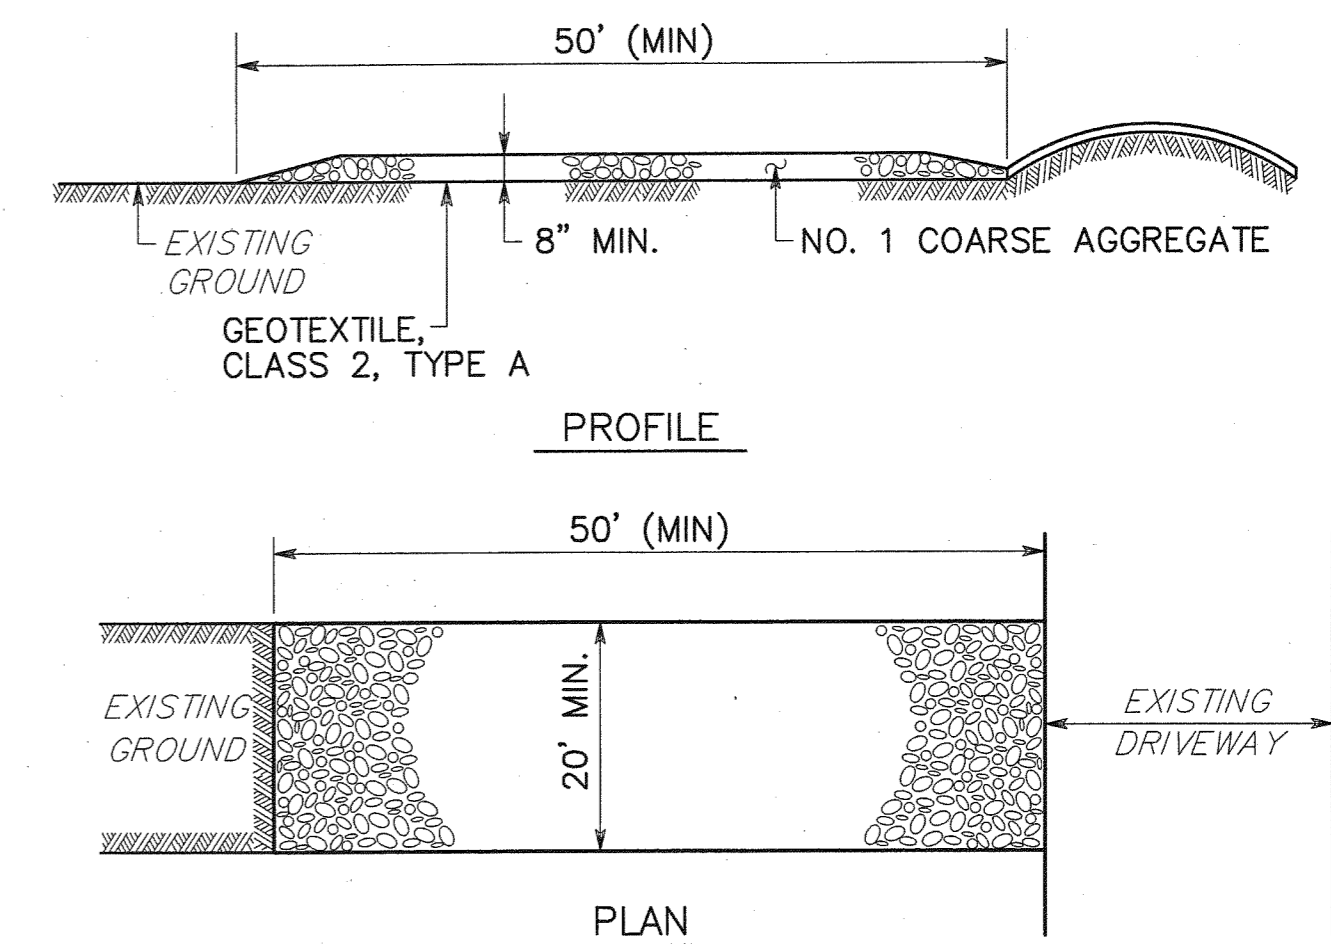

ROCK CONSTRUCTION ENTRANCE (RCE)
 NOT TO SCALE

SEDIMENT FILTER BAG NOTES

- FILTER BAGS MAY BE USED ON LOW VOLUME DEWATERING OPERATIONS NOT TO EXCEED 3785 LITERS (1000 GALLONS) PER MINUTE.
- CLEAR SITE BUT DO NOT GRUB.
- INSPECT AREA TO DETERMINE PATH DISCHARGE WATER WILL TAKE. STABILIZE ANY POTENTIALLY ERODABLE AREAS (STEEP SLOPES).
- CONSTRUCT COARSE AGGREGATE PLATFORM SURFACE LEVEL. PLACE SEDIMENT FILTER BAG ON STABILIZED AREA.
- IF THE EXISTING AREA IS STABILIZED, STRAW MAY BE USED INSTEAD OF #57 COARSE AGGREGATE. PLACE BAG OVER STRAW DISTRIBUTED AT THE RATE OF 1 BALE PER 30 SQ. FT.
- USE PUMP WITH A RATING IN GALLONS PER MINUTE NOT TO EXCEED 50% OF THE MAXIMUM FLOW RATE LISTED ON THE BAG LABEL. DOUBLE CLAMP THE PUMP DISCHARGE HOSE FIRMLY TO THE BAG.
- MONITOR AND EVALUATE THE ENTIRE PUMPING OPERATION TO ASSURE THAT THE BAG CONTINUES TO FUNCTION PROPERLY. REPLACE THE BAG WHEN THE CONTAINED SILT REDUCES THE BAGS FLOW TO APPROXIMATELY 50% OF THE RATE OF INITIAL DISCHARGE, OR WHEN DIRECTED BY INSPECTOR-IN-CHARGE. DISPOSE OF SEDIMENT IN A MANNER SATISFACTORY TO THE ENGINEER. RESTORE THE AREA AS SPECIFIED IN SECTION 105.14.
- A SUITABLE MEANS OF ACCESSING THE BAG WITH MACHINERY REQUIRED FOR DISPOSAL PURPOSES MUST BE PROVIDED.

