



5

DISTRICT	COUNTY	ROUTE	SECTION	SHEET
8 - 0	CUMBERLAND AND YORK	2011	005	6 OF 15
MONROE TOWNSHIP AND CARROLL TOWNSHIP				
REVISION NUMBER	REVISIONS	DATE	BY	

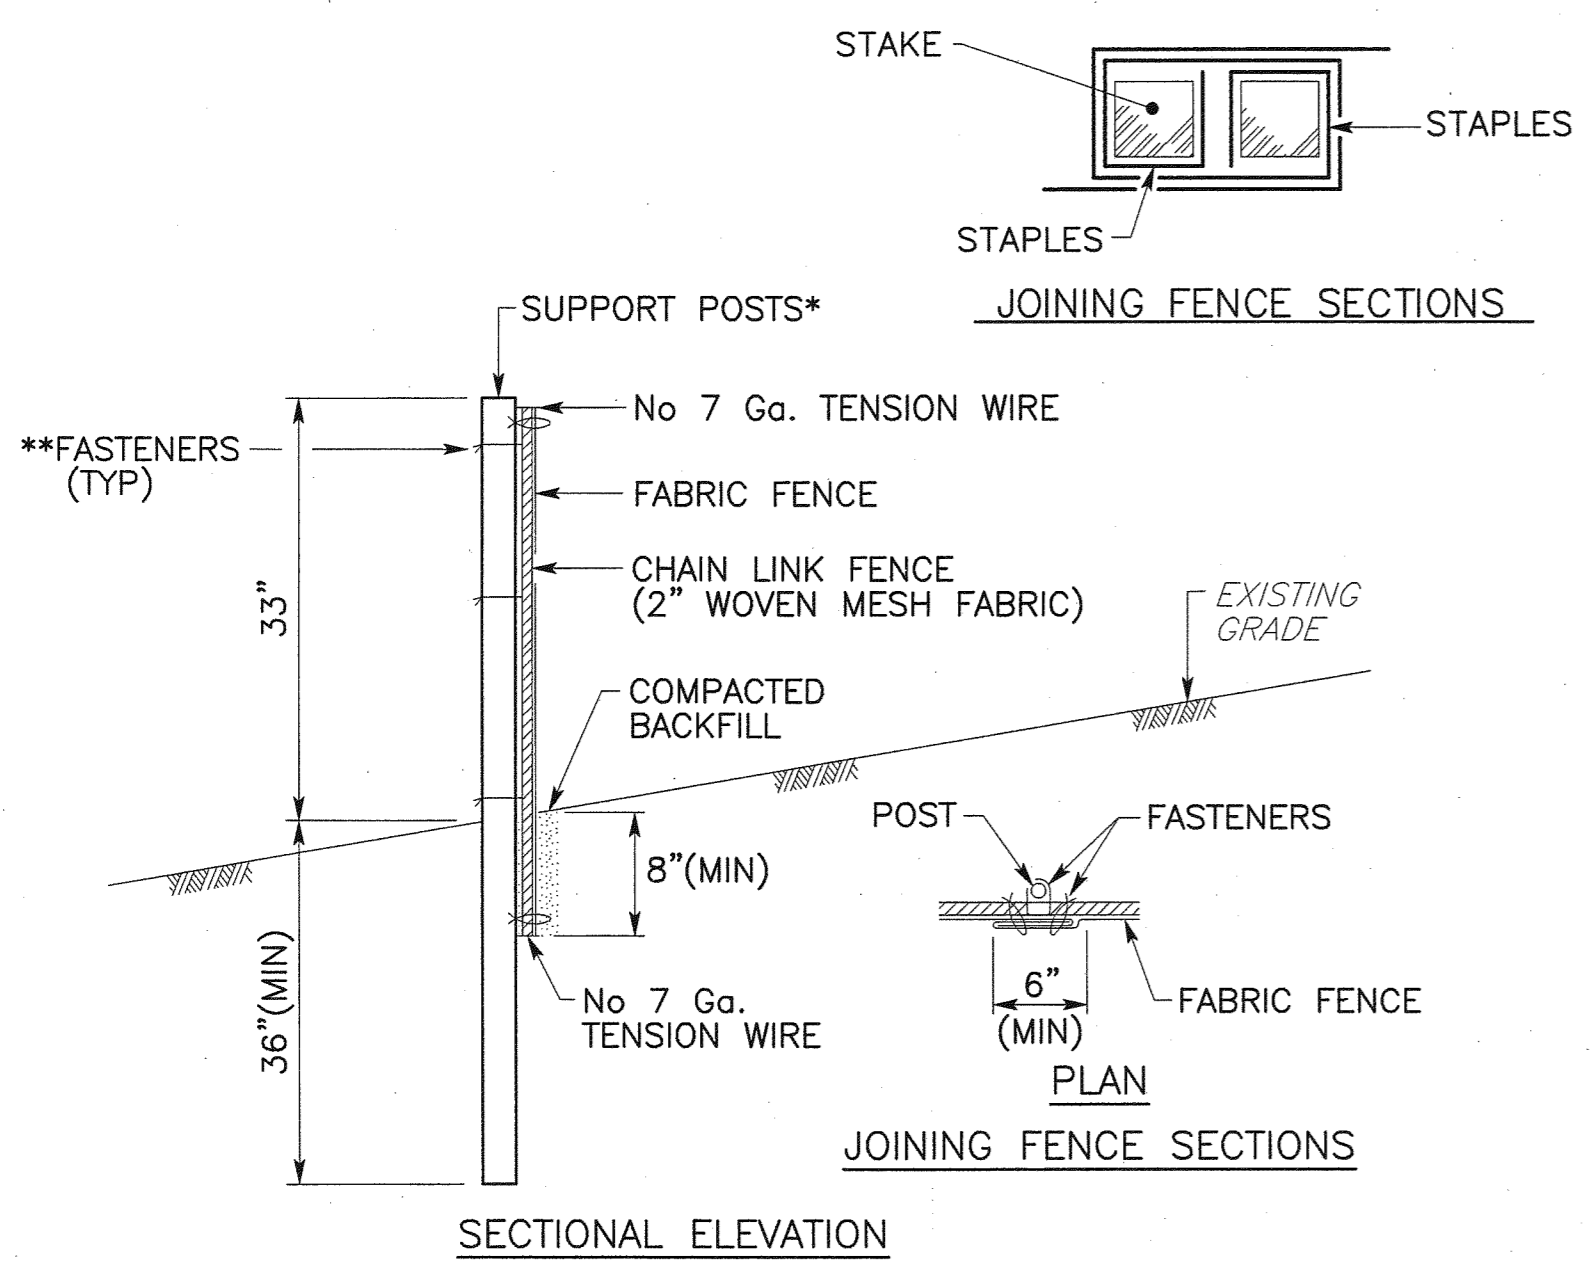


- \* POSTS SPACED @ 10' MAX. USE 2 1/2" DIA. GALVANIZED OR ALUMINUM POSTS.
- \*\* CHAIN LINK TO POST FASTENERS SPACED @ 14" MAX. USE No. 6 Ga. ALUMINUM WIRE OR No. 9 GALVANIZED STEEL PRE-FORMED CLIPS. CHAIN LINK TO TENSION WIRE FASTENERS SPACED @ 60" MAX. USE No. 10 Ga. GALVANIZED STEEL WIRE. FABRIC TO CHAIN FASTENERS SPACED @ 24" MAX. C TO C.

- NOTES**
- No. 7 Ga. TENSION WIRE INSTALLED HORIZONTALLY AT TOP AND BOTTOM OF CHAIN LINK FENCE.
  - FILTER FABRIC FENCE MUST BE PLACED AT EXISTING LEVEL GRADE. BOTH ENDS OF THE BARRIER MUST BE EXTENDED AT LEAST 8 FEET UPSLOPE AT 45 DEGREES TO THE MAIN BARRIER ALIGNMENT.
  - SEDIMENT MUST BE REMOVED WHEN ACCUMULATIONS REACH 1/2 THE ABOVE GROUND HEIGHT OF THE FENCE.


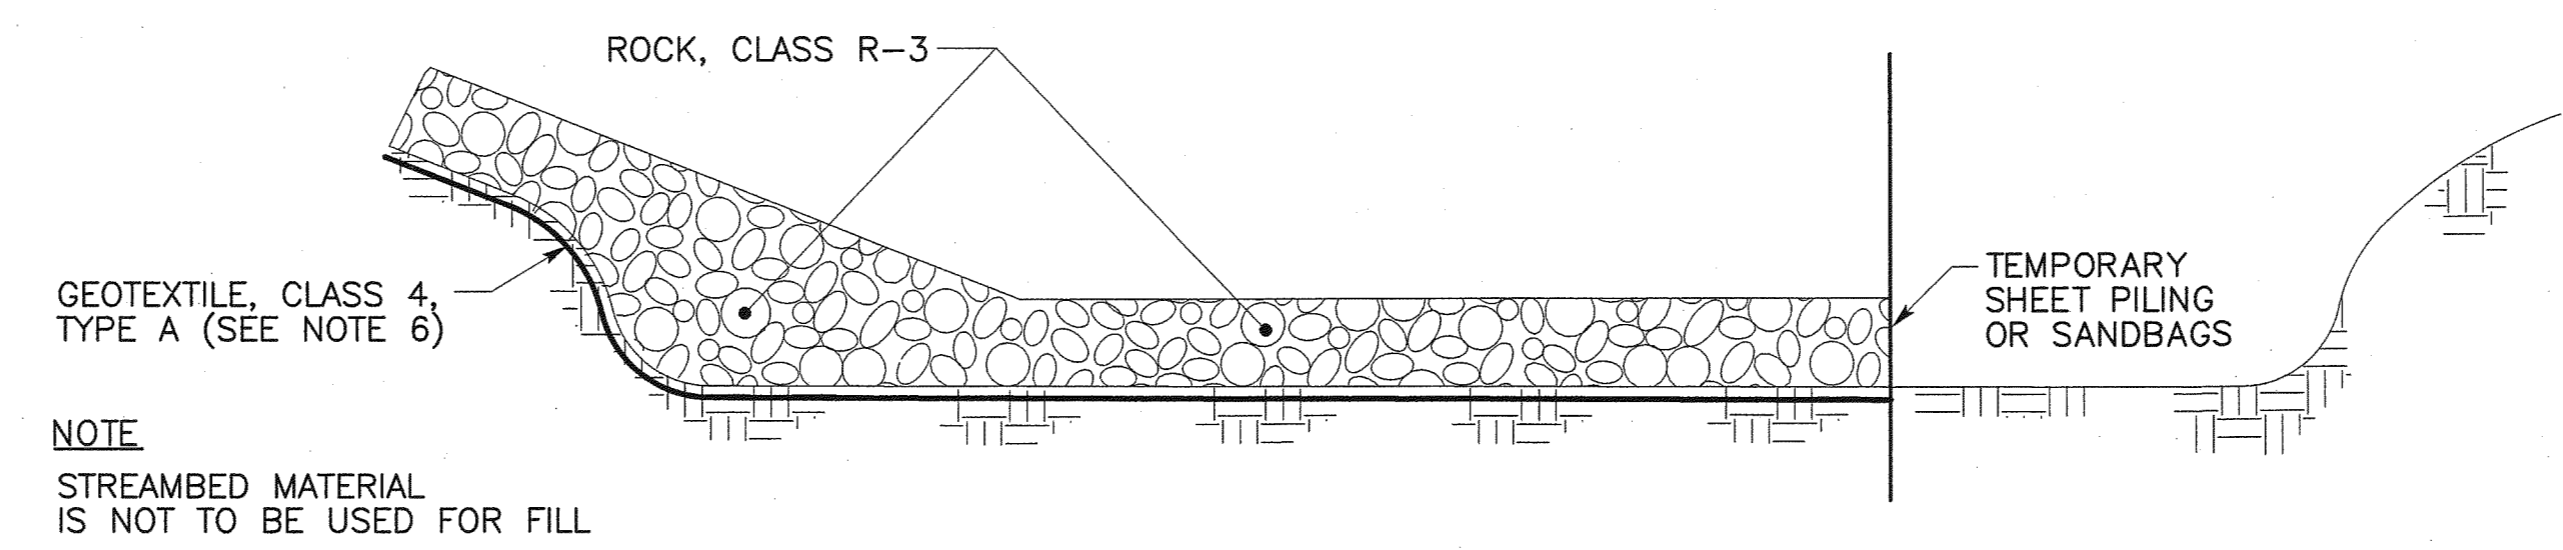


**NOTE**  
 STREAMBED MATERIAL IS NOT TO BE USED FOR FILL

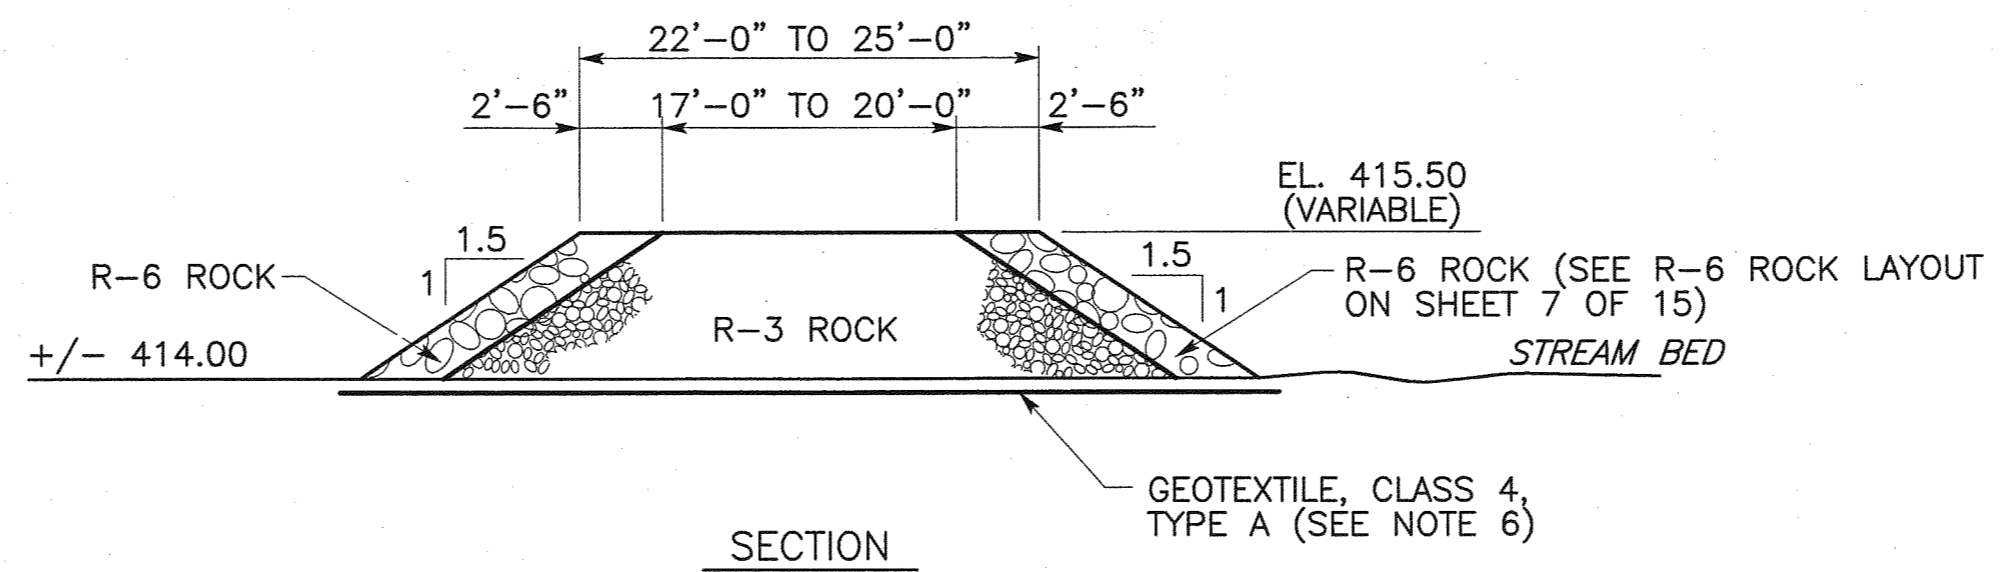

- NOTES**
- STREAM CAUSEWAY SHOULD BE DEPRESSED TO ALLOW OVERFLOW.
  - CLEAN ROCK FILL SHALL BE USED TO GUARD AGAINST EROSION AND SEDIMENTATION. STREAMBED MATERIAL IS NOT TO BE USED.
  - APPROACH TO CAUSEWAY IS NOT TO EXCEED A DEPTH OF 6 INCHES ABOVE ORIGINAL GRADE.
  - ALL EXCAVATED MATERIALS THAT WILL NOT BE USED ON SITE MUST BE DISPOSED OF OFFSITE BY ACCEPTABLE MEANS.
  - THE CAUSEWAY MUST BE DESIGNED AND INSTALLED IN ACCORDANCE WITH CHAPTER 105 RULES AND REGULATIONS OF PADEP.
  - PROVIDE GEOTEXTILE MATERIAL ALONG ALL INTERFACE AREAS WITH GROUND CONTENT.
  - PROPER EROSION AND SEDIMENTATION CONTROL MEASURES MUST BE INSTALLED.

**(ITEM 9000-0003)**  
**TEMPORARY CAUSEWAY**  
 NOT TO SCALE

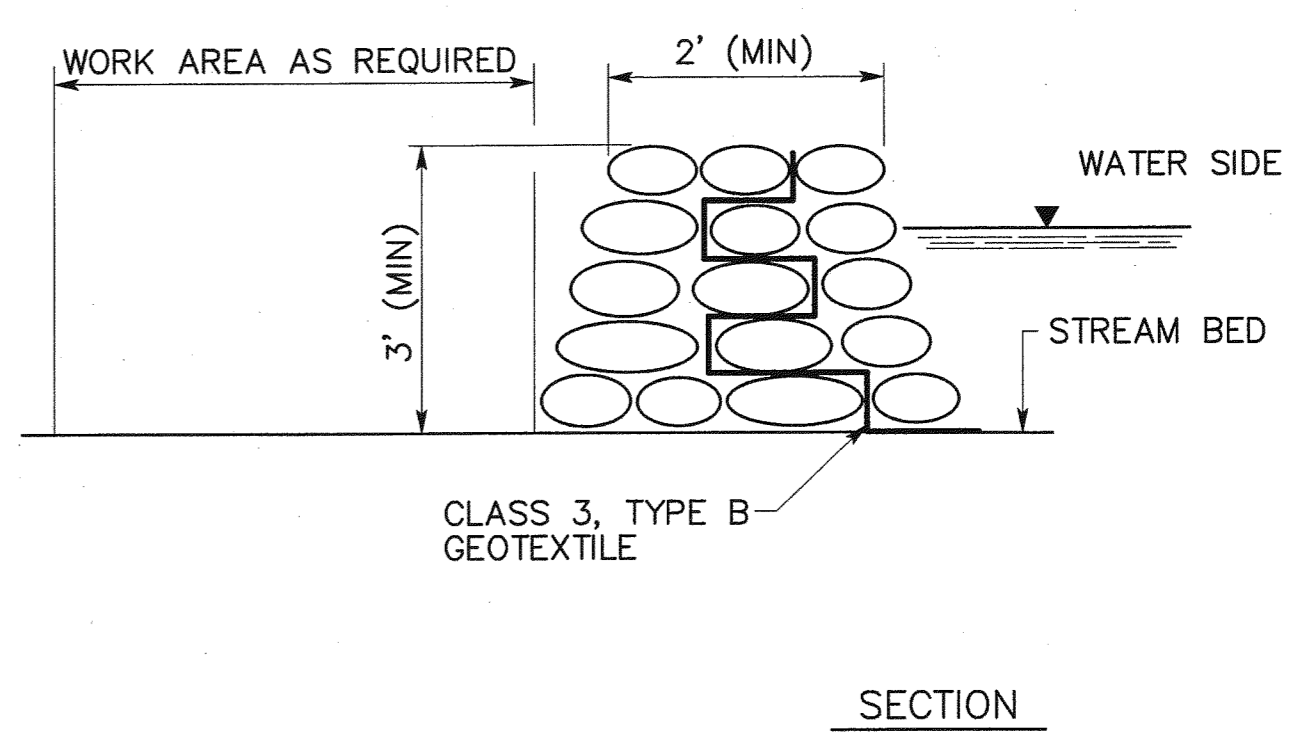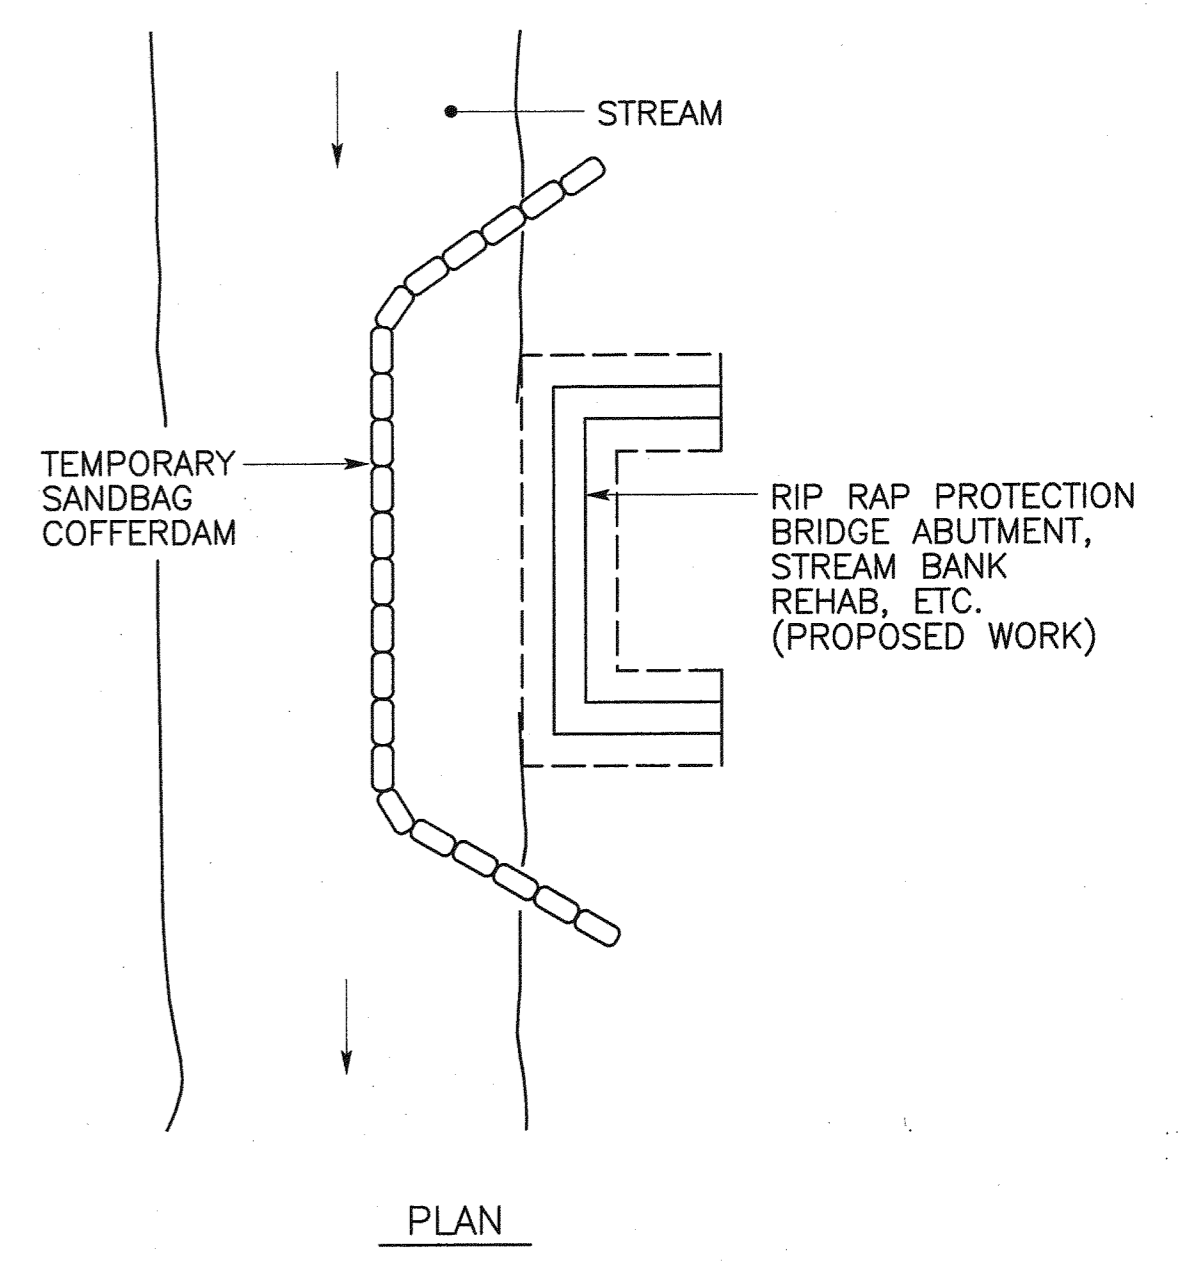

**(ITEM 9000-0004)**  
**TEMPORARY IN-STREAM DIVERSION DEVICE**  
 NOT TO SCALE

**TEMPORARY STREAM CAUSEWAY QUANTITIES**  
 (FOR INFORMATION ONLY) INCLUDED IN ITEM 9000-0003

DESCRIPTION	UNIT	QUANTITY	
		STAGE 1	STAGE 2
GEOTEXTILE, CLASS 4, TYPE A	SY	804	892
36" CORRUGATED GALVANIZED STEEL PIPE, TYPE I, (2 2/3" x 1/2" CORRUGATIONS), 16 GAGE	LF	92	200
ROCK, CLASS R-3	CY	494	248
ROCK, CLASS R-6	CY	31	51
CLASS 1 EXCAVATION	CY	72	0

